


Auto Splicer

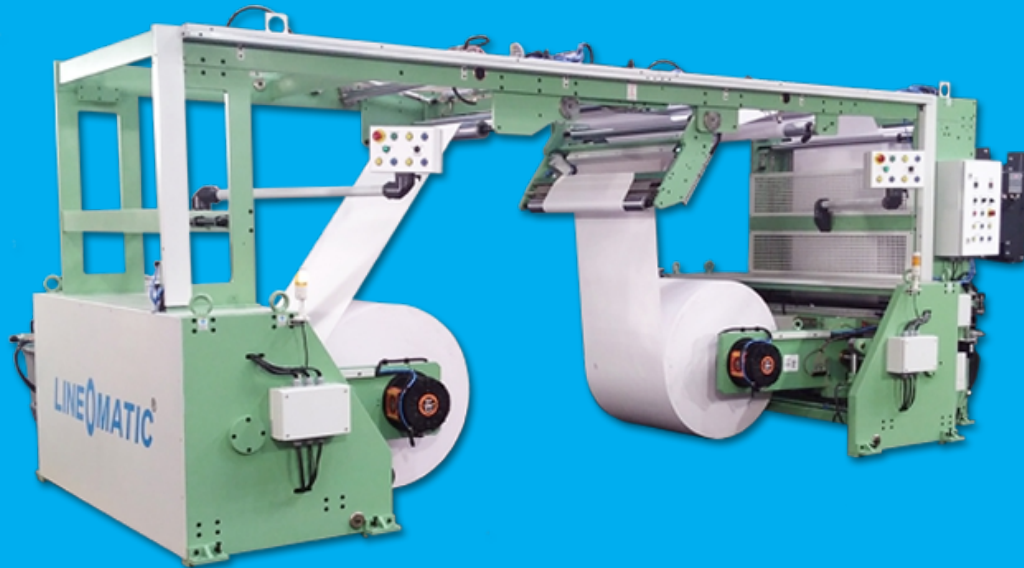

Auto Splicer is designed for easy paper joining activity without stopping the machine. It has second Reel which is to be pre-loaded and use it when the first reel gets empty in order to make paper joining operation without stopping the machine and without compromising printing quality. Unloading of reel, loading of new reel and alignment of web will be carried out while one reel stand is in idle condition. Accumulator is a key part in Auto Splicer which accumulates the paper and provides the stored paper while automatic paper joining is taking place and hence, machine is not required to be stopped.

Technical Specifications

Model	Auto Splicer
Max. Reel Width	1040 mm
Min. Reel Width	400 mm
Max. Reel Dia.	1400 mm
Max. Reel Weight	1000 Kgs
Max. Splicing Speed	90 Mtrs./Min.

Features

- Shaft less reel stand with mechanical chuck for mounting the reel
- Floor pickup of reels as well as its loading through fork adjustment by hydraulic mechanism
- Automatic and advanced de-curling system
- Monitoring the diameter of reel on the H.M.I. with the help of "reel diameter sensor"
- Electro-pneumatic tension control system
- Pneumatically operated Accumulator